




Optional Accessories

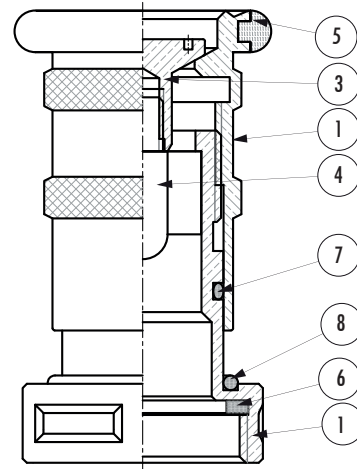

Features

- Available sizes: 1 1/2 and 2 1/2 inch.
- Adjustable fog, straight stream and shut off
- Finish: Brass and Chrome
- Thread: NST
- NST to BS336 male adaptor available if required.
- Nozzle pressure rating: 100 psi
- Service Range: 20 ~100 psi
- Discharge GPM as in UL listing

Description

LIFECO's adjustable spray hose nozzle is made of cast bronze and designed in accordance with UL 401 – Standard for Portable Spray Hose Nozzles for Fire-Protection Service. The hose nozzle is intended for use with fire department equipment and for use with fire hose mounted on standpipe systems. The LF-SHN Series is available in sizes 1-1/2 inch and 2-1/2 inch which is rated for use at an inlet pressure of 100 psi. It is a basic spray type nozzle with a rotational type control, the nozzle is of an adjustable type having a water spray discharge ranging from a wide cone shaped pattern to a straight stream to shut-off. The nozzles are intended for use on class A and B fires only.

Material Specification

Sl No.	Part Name	Quantity	Material
1	Barrel	1	Forged Brass
2	Spindle	1	Forged Brass
3	T-Head	1	Forged Brass
4	Commutator	1	Forged Brass
5	Rubber Guard	1	Synthetic Rubber - NBR
6	Packing	1	Synthetic Rubber - #E701N
7	O-Ring	1	EPDM - E7000AA
8	O-Ring	1	EPDM - E7000AA

Model No.	Size In.	Nozzle Pressure psi	Discharge GPM Wide Open
LF-SHN40	1 ½	100	130
LF-SHN65	2 ½	100	205