





## Technical & Environmental Specification

<b>Input voltage</b>	24VDC 12~30VDC	
<b>Sound output</b>	100±5dB	
<b>Operating temperature</b>	-10°C ~ +60°C	
<b>Material</b>	ABS / Polycarbonate	
	<b>LF-SI</b>	<b>LF-SS</b>
<b>Operating current</b>	22~28mA	50~65mA
<b>Tone type</b>	Sweep siren	Alarm siren
<b>Colour</b>	Red	Red

## Dimension Details

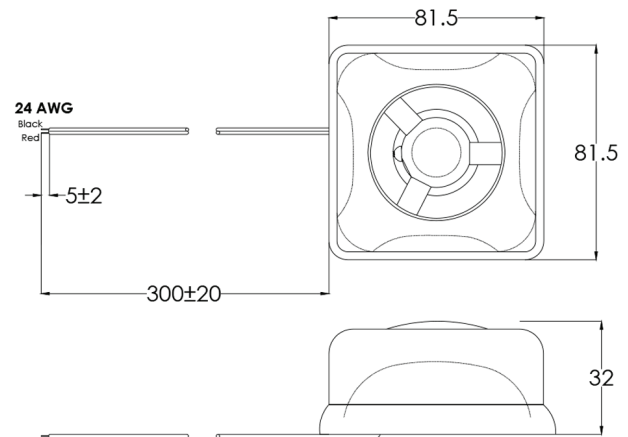

LF-SI Sweep Siren

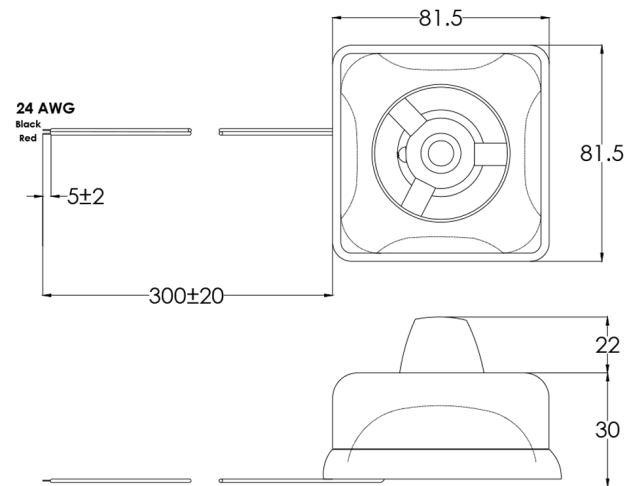

LF-SS Alarm Siren

## Features

- Quick response time
- 100±5dB (@24v DC)
- Piezoelectric horn
- High performance at low cost
- Integrated electronics
- High intensity strobe
- With reverse polarity protection
- Easy maintenance
- Easy to Install
- 2-Wire Operation
- Ceiling or sidewall mount

## Description

The LF-SI/SS Audible strobes and sirens are designed for maximum performance, reliability and cost effectiveness. It adopts a built-in integrated circuit, a piezoelectric sounder and high intensity strobe which when combined, produces high energy conversion efficiency for effective output of light and sound while utilizing a minimum amount of power.

The LF-SI & LFSS can be mounted by opening the front cover and installing the body of the device to a standard 3" square box.

The mounting holes are hidden when the cover is placed. Together with the modern style of the strobe unit and the contour of the device, makes it appealing with any building wall design.

The indicator's design widely applies to all kinds of industrial and commercial constructions with its high resistance to humidity, wide operating temperature range, high reliability and ease of installation and configuration.