




Description

- Heavy duty construction for optimum abrasion resistance
- Weather, ozone and ageing resistant with long service life
- Easy to repair, clean and maintain
- The breaking strength of the jacket threads meets the requirements of UL
- The tensile strength and ultimate elongation of inner lining meet the requirements of UL
- Hose is designed to withstand 1 1/2 times the service pressure without rupturing or breaking any thread in the jacket as per UL
- Burst and working pressures meet NFPA 1962 standards
- Available sizes 1 1/2 & 2 1/2
- Comes in red, yellow or white color
- Single or Double Jacket (Optional)
- NST or BS336 end connection (Optional)

Features

LIFECO hoses consist of an exterior heavy duty all synthetic single or double jackets with unified construction that is free of defects and anomalies. And from a smooth internal lining that consists of black ethylene propylene rubber (EPDM) tube for minimum friction loss and high abrasion resistant. LIFECO hoses are suitable for all fire fighting applications including municipal and industrial fire brigades, oil and petrochemical refineries, airports, agriculture purposes, construction industry, pumping and general industrial use, etc. LIFECO hoses meet or exceed the requirements of UL and bear the UL mark.

Model	LF4015SJ	LF4025SJ	LF4015DJ	LF402DJ
Hose Size	1 1/2	2 1/2	1 1/2	2 1/2
Working Pressure (PSI)	150/180/200	150/180/200	220/250/300	220/250/300
Burst Pressure (PSI)	450/540/600	450/540/600	660/750/900	660/750/900
Length	50-100 ft	50-100 ft	50-100 ft	50-100 ft

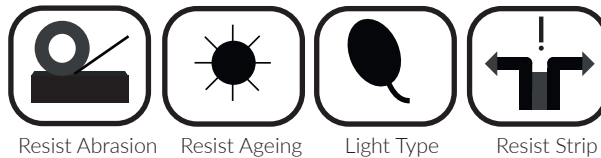

Resist Abrasion

Resist Ageing

Light Type

Resist Strip