


Dimension Details

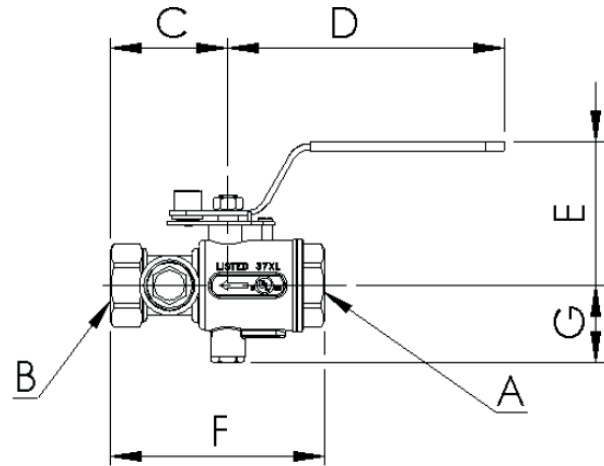

Description

The LIFECO Test and Drain valve is a lever operated ball valve, sight glass and stop valve. Test and Drain is manufactured with sight glass assembly, provides a simplified means for testing water flow alarm devices and draining of feed mains.

The test and drain valve complies with NFPA13 sprinkler systems.

Features

- Female NPT inlet and outlet
- Threaded to BS21 or ANSI B1.20.1
- Grooved to ANSI/AWWA C606- 11
- BRASS ASTM C85700
- Working pressure 175PSI
- Grooved type available upon request
- Cast brass valve
- Optional Finishes: RB-Rough Brass

Size (mm)	C	D	E	F	G
1" NPT	63	148	76	115	41.5
1¼" NPT	68.3	161	68	123	43
1½" NPT	74	173	74.5	136	50
2" NPT	81.5	160	90	153	57.5
1½" Grooved	74	173	74.5	136	50
2" Grooved	81.5	160	90	153	57.5